



EOS Cubo+

Sauna heater for domestic and commercial saunas. Floor-standing model.

Floor-standing sauna heater for Finnisch (dry) sauna in straightlined, cubistic design. Thanks to the flat rear wall, Cubo+ is ideal for installation in front of glass panels. Extra large rock store is placed above the heating elements for easy servicing and improved air convection.

Your advantages:

- Durable, long-lasting construction
- Extra large 45 kg rock store volume
- Optimal relation between stone volume and air convection system for fast heat-up times and powerful water infusions
- Scratch resistant anthracite pearl effect powder coating
- Compact size - only 38,5 cm depth.
- Optional rear wall cover panel in anthracite pearl effect finish
- Optional mounting brackets for safety guard rail mounting directly to the heater
- Made in Germany quality from EOS

Specifications:

Outer shell:	Anthracite pearl effect powder coated steel, scratch resistant
Top:	Brushed stainless steel
Rear wall:	Stainless steel (polished)
Rock store:	Stainless steel, above heating elements
Terminal box:	Stainless steel, recessed in rear wall
Power range:	7.5, 9.0, 10.0, 10.5 and 12.0 kW
Power supply:	400 V 3N ~ Hz
Dimensions (HxWxD):	95 x 40 x 38,5 cm
Rock store volume:	approx. 45 kg (Sauna stones optionally available)
Installation:	Floor-standing




Stack frame for extra 15 kg stones and safety guard rail optionally available




Rear side cover panel optionally available

Connection diagram

7,5 / 9,0 / 10,0 kW

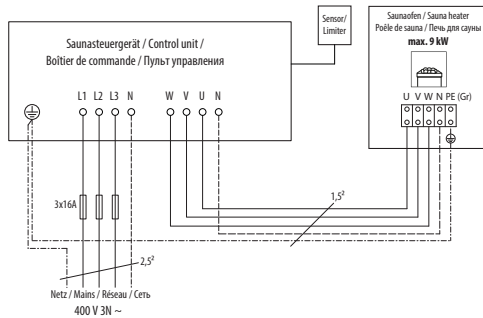


10,5* - 12,0 kW

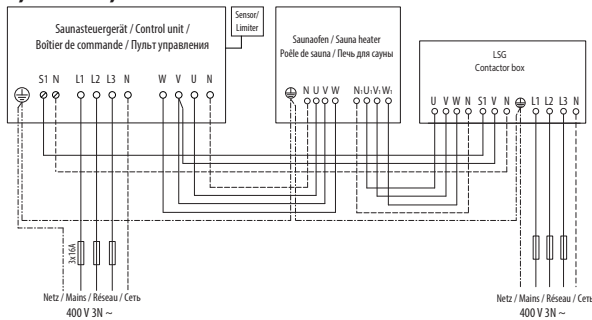

*Also available as a single-circuit version 10 kW, for control units of EOS Compact series.

Minimum clearances

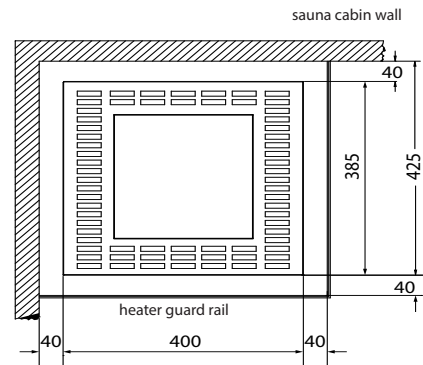

Suitable control units

Model

EOS Econ D series (D1 up to 9,0 kW)

EOS Compact D series

EOS EmoTec D series

EOS EmoStyle D / Hi series

EOS EmoTouch 3 series

Power extension unit (e.g. LSG 10) is required for 10,5 and 12 kW heaters.

Technical specifications

Power output	Electrical connection	Connection mains - control unit	Connection control unit - heater	Connection mains - LSG	Connection LSG - heater	Connection control unit - LSG unit
7,5 kW	400 V 3N ~ 50 Hz	5 x 2,5 mm ²	5 x 1,5 mm ²	--	--	--
9,0 kW						
10,0 kW				5 x 2,5 mm ²	5 x 1,5 mm ²	4 x 1,5 mm ²
10,5 kW				5 x 2,5 mm ²	5 x 1,5 mm ²	4 x 1,5 mm ²
12,0 kW				5 x 2,5 mm ²	5 x 1,5 mm ²	4 x 1,5 mm ²

All cross sections of a line are minimum diameters in mm² (copper wire).

Spare heating elements

Description	Item no.
For 7,5 kW (5 x 1500W)	2000 8085
For 9,0 kW (6 x 1500 W)	2000 8085
For 10,0 kW (6 x 1666 W)	2001 7026
For 10,5 kW (3x1500W, 3x2000W)	2000 8085/8086
For 12 kW (6 x 2000 W)	2000 8086

Item no.	Power output	Electrical connection	Fuse protection control unit	Fuse protection LSG unit	Dimensions H/W/D, in cm	For sauna cabin size	Min. size air inlet and outlet	Weight without rocks	Stone filling	Power extension required
94 5974	7,5 kW	400 V 3N ~ 50 Hz	3 x 16 A	--	72 / 40 / 38,5	7 - 10 m ³	35 x 5 cm	32 kg	ca. 45 kg	no
94 5975	9,0 kW					9 - 14 m ³	35 x 6 cm			
94 7881	10,0 kW					11 - 15 m ³	35 x 6 cm			
94 5976	10,5 kW					14 - 18 m ³	35 x 6 cm			
94 5977	12,0 kW					14 - 18 m ³	35 x 7 cm			